




THE AKRON PRODUCTS COMPANY™

WE SUPPORT WHAT CANADIANS BUILD

NOUS SUPPORTONS CE QUE LES CANADIENS CONSTRUISENT



THE BEST, MADE BETTER STILL.

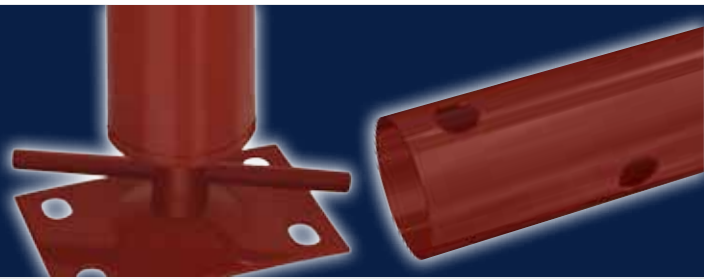

PRECISION MANUFACTURING



**INNOVATIVE ENGINEERING
SOLUTIONS**




**VERTICALLY INTEGRATED
TUBE MILL**

After 68 years as North America's leading manufacturer of adjustable columns and telescoping support posts, we've learned one indelible truth: our business isn't simply about supporting floors, beams or joists – It's also about supporting you.

The performance of our products are superior in every respect; they are not simply manufactured, but engineered in the most sophisticated design, process automation and testing facilities in the industry. Powder coated for ultimate protection and "green by design." And constantly refined for strength, with greater structural integrity and thicker plates. Our evolving specifications say it all.

And we don't simply sell those products. We surround them with equally advanced marketing, merchandising, service and support. Our vertically integrated tube mills assure the most consistent quality and supply chain dependability, so product by product, feature for feature, The Akron Products Company can deliver the reliability and innovation that builds sales, profitability and long-term customer satisfaction.

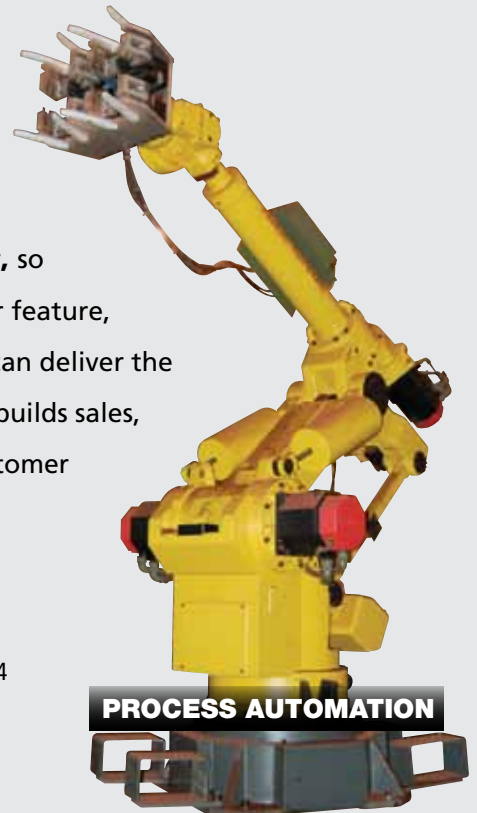


PROCESS AUTOMATION

Our telescoping support posts have a CCMC Evaluation Listing 13269-L, Conforms to CAN/CGSB-7.2-94
Our Mono Post products have a CCMC Evaluation Listing 13250-L, Conforms to CAN/CGSB-7.2-94



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

LE MEILLEUR FAIT MIEUX ENCORE

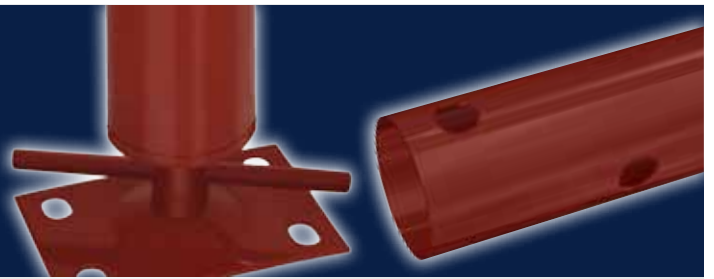

FABRICATION DE PRÉCISION



INGÉNIERIE INNOVANTE SOLUTIONS



USINE DE TUBES VERTICALEMENT INTÉGRÉE

Nos poteaux de soutien télescopiques ont une fiche d'évaluation CCMC 13269-L, conforme à la norme CAN/CGSB-7.2-94

Nos produits monotubulaires ont une fiche d'évaluation CCMC 13250-L, conforme à la norme CAN/CGSB-7.2-94

Après 68 ans comme chef de file en Amérique du Nord en matière de colonnes ajustables et de poteaux de soutien télescopiques, nous avons appris une vérité incontournable : notre mission n'est pas seulement de soutenir des planchers, des poutres ou des solives, mais elle est également de vous soutenir.

La performance de nos produits est inégalée sous tous les aspects; nos produits ne sont pas seulement fabriqués de façon supérieure, ils sont également créés en utilisant les conceptions, l'automatisation des processus et les installations d'essais les plus avancées de l'industrie. Nos produits possèdent un revêtement en poudre et ont une conception naturellement écologique. Ils sont constamment améliorés pour offrir davantage de robustesse grâce à une intégrité structurelle supérieure et des plaques plus épaisses. Nos caractéristiques en constante évolution en témoignent parfaitement.

Et nous ne nous contentons pas seulement de vendre nos produits. Nous offrons également un marketing, une marchandisation, un service et un soutien de premier ordre pour les accompagner. Nos tuberries intégrées verticalement assurent une qualité constante et une fiabilité exceptionnelle au niveau de la chaîne d'approvisionnement, c'est pourquoi chaque produit et chaque caractéristique de Akron Products Company peuvent offrir la robustesse et l'innovation qui entraînent les ventes, la rentabilité et la satisfaction à long terme des clients.



PROCESS AUTOMATION




TELESCOPING SUPPORT POST

**FOR SECURE PERMANENT AND
TEMPORARY SUPPORT UNDER THE
HEAVIEST LOAD AREAS.**

- Easy to adjust, easy to install, incredibly adaptable
- Use for permanent or temporary support while mending, replacing or installing structural supports
- Designed with multiple features for added safety

USE FOR:

- | | |
|-----------------------|--|
| • Room additions | • Attics |
| • Porches and decks | • Basement beams |
| • Remodeling projects | • Under kitchen areas
with granite counters
& heavy appliances |
| • Sagging floors | |
| • Under stairs | |

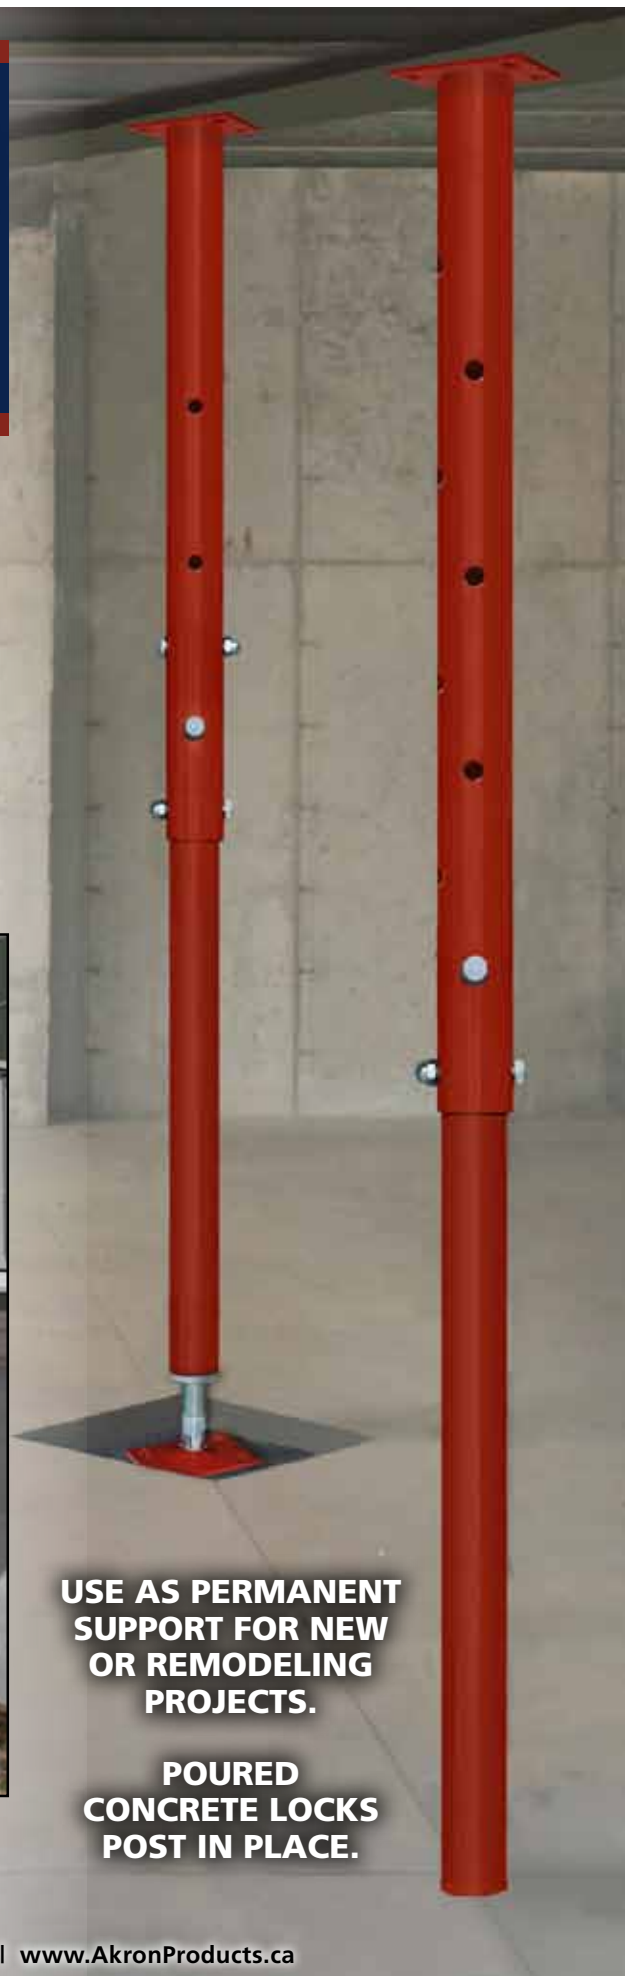

POTEAU DE SOUTIEN TELESCOPIQUE

POUR UN SOUTIEN PERMANENT SÉCURITAIRE OU UN SOUTIEN TEMPORAIRE DES CHARGES LES PLUS ÉLEVÉES.

- Facile à ajuster, facile à installer et incroyablement polyvalent
- À utiliser pour le soutien permanent ou temporaire pour réparer, remplacer ou installer des soutiens structurels
- Conçu avec de multiples caractéristiques pour une sécurité accrue


À utiliser pour :

- Ajouts de pièces
- Galeries et terrasses
- Projets de rénovation
- Planchers qui s'affaissent
- Soupentes
- Greniers
- Poutres de sous-sol
- Sous les cuisines comportant des comptoirs en granite ou des appareils lourds



TELESCOPING SUPPORT POST

ALL STEEL • POWDER COATED • ADJUSTABLE • EASY TO INSTALL

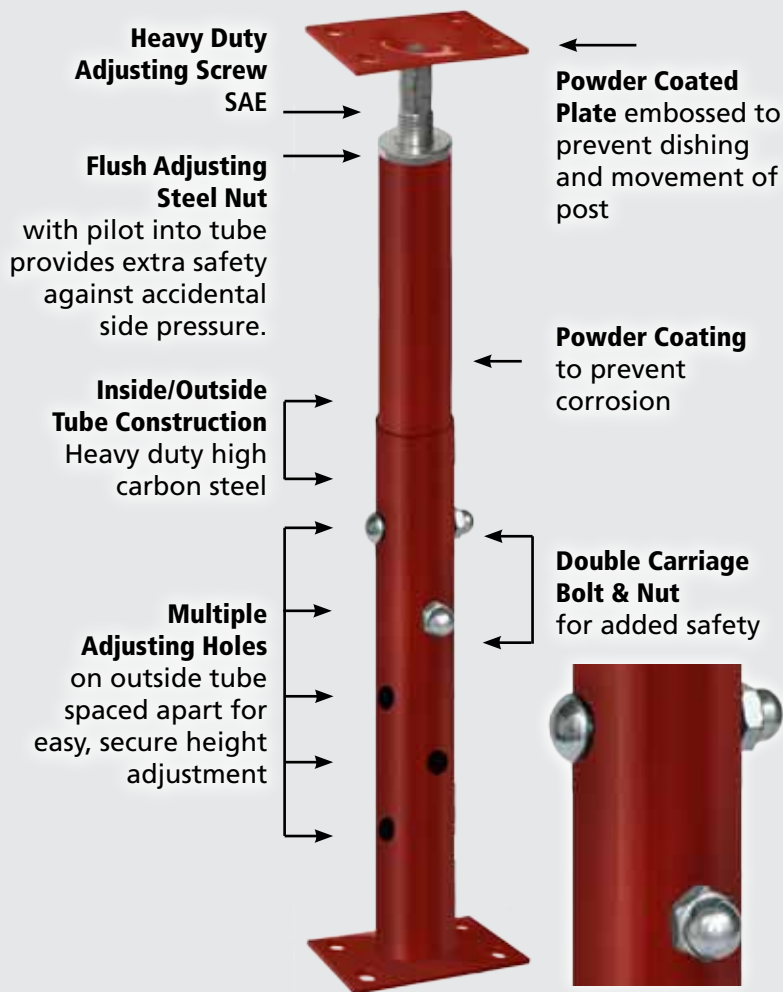

Designed for heavy load areas, with added strength in every component:

- 11 gauge inside/outside high carbon steel tubes
- Heavy gauge steel plates
- Double carriage bolt design for added safety
- Corrosion-resistant powder coating
- Zinc-coated secure bolt/nut connectors

CCMC Evaluation Listing 13269-L, Conforms to CAN/CGSB-7.2-94

Standard End Plate:

Embossed to prevent dishing and movement of post

Size: 4" x 6" x .250"

Heavy Duty Adjusting Screw and Flush Adjusting Steel Nut



TELESCOPING SUPPORT POSTS 2 ³ / ₄ " OD Outside Tube, 2 ¹ / ₂ " OD Inside Tube; 3 ¹ / ₃₂ " x 4" x 6" Plates				
11 GA.	ADJUSTMENT RANGE	UPC	ALLOWABLE LOAD	CARTON WEIGHT
CA-108	6' 2" - 9' / 1.88m. - 2.74m.	7-16733-31108-4	8,655 lbs. (38.5 kN)	37 lbs.
CA-84	4' 8" - 8' 4" / 1.42m. - 2.54m.	7-16733-13841-4	8,280 lbs. (36.8 kN)	31 lbs.
CA-2	2' 10" - 4' 7" / .86m. - 1.40m.	7-16733-13021-0	13,002 lbs. (57.8 kN)	20 lbs.
CA-3	1' 7" - 3' / .4 m. - .91m.	7-16733-13031-9	14,746 lbs. (65.6 kN)	15 lbs.




The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

© Akron Products Company 2014

POTEAU DE SOUTIEN TÉLESCOPIQUE

ENTIÈREMENT EN ACIER • REVÊTEMENT EN POUDRE • AJUSTABLE • FACILE À INSTALLER

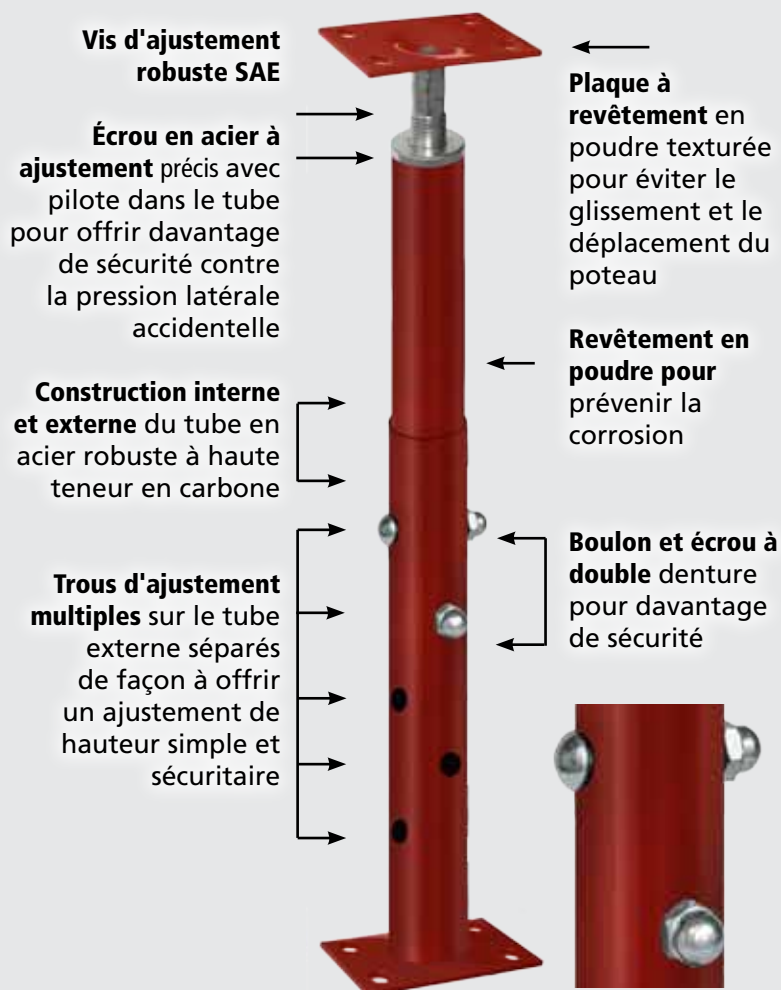

Conçu pour les charges lourdes, avec de la robustesse ajoutée dans toutes les composantes :

- Tubes en acier interne/externe à haute teneur en carbone de calibre 11
- Plaques en acier de haut calibre
- Conception de boulon à double denture pour davantage de sécurité
- Revêtement en poudre résistant à la corrosion
- Connecteurs boulon/écrou sécuritaires recouverts de zinc

Fiche d'évaluation CCMC 13250-L, conforme à la norme CAN/CGSB-7.2-94

Plaque d'extrémité standard :
Texturée pour éviter le glissement et le déplacement du poteau

Dimensions : 10 cm x 15 cm x 0,64 cm (4 po x 6 po x 0,250 po)

Vis d'ajustement robuste et écrou en acier à ajustement précis



POTEAUX DE SOUTIEN TÉLESCOPIQUES $2\frac{3}{4}$ " D.E. de tube extérieur, $2\frac{1}{2}$ " D.E. de tube intérieur de ; $\frac{3}{32}$ " x 4" x 6" Plaques


11 GA.	PLAGE D'AJUSTEMENT	UPC	CHARGE PERMISE	POIDS DE L'EMBALLAGE
CA-108	6' 2" - 9' / 1.88m. - 2.74m.	7-16733-31108-4	8,655 lbs. (38.5 kN)	37 lbs.
CA-84	4' 8" - 8' 4" / 1.42m. - 2.54m.	7-16733-13841-4	8,280 lbs. (36.8 kN)	31 lbs.
CA-2	2' 10" - 4' 7" / .86m. - 1.40m.	7-16733-13021-0	13,002 lbs. (57.8 kN)	20 lbs.
CA-3	1' 7" - 3' / .4 m. - .91m.	7-16733-13031-9	14,746 lbs. (65.6 kN)	15 lbs.



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

TELESCOPING SUPPORT POST

INSTALLATION INSTRUCTIONS

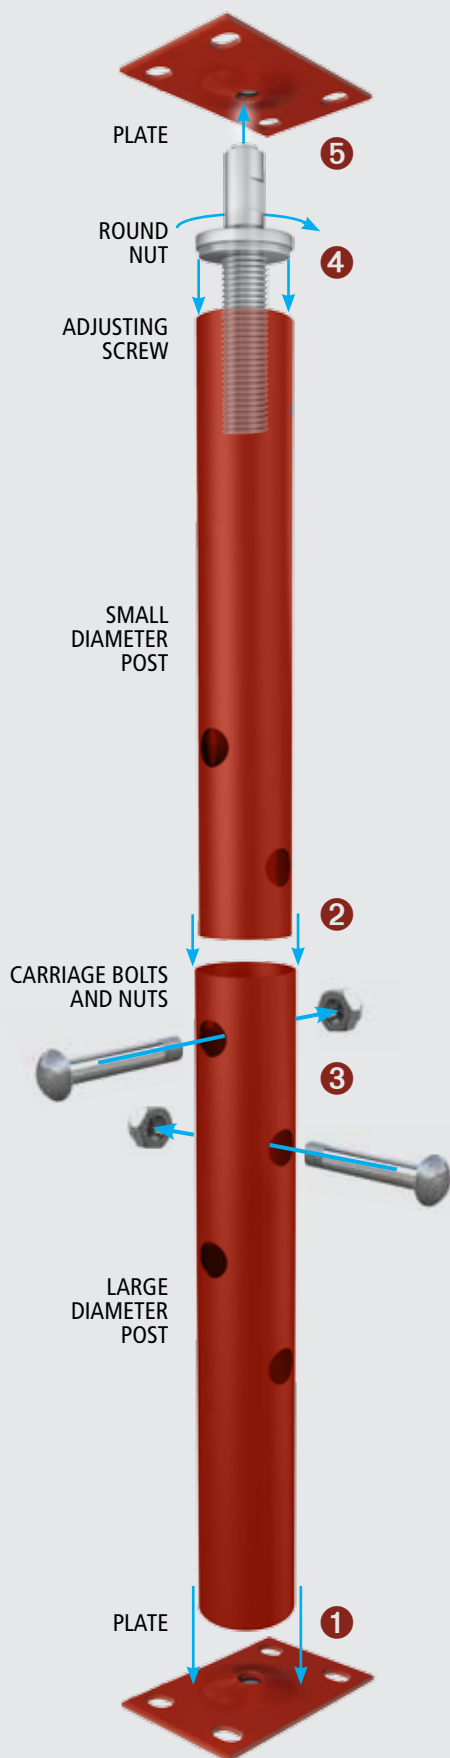

1. Place the flat side of one of the plates on footing. Put the larger diameter post over the plate with the holes oriented at the top (Figure 1). Reverse for shorter applications. For 12"-15" Jack skip steps 2 and 3.
2. Insert the smaller diameter post inside the larger diameter post. The hole end of the smaller diameter tube is required to be inserted into the outer diameter tube (Figure 2).
 - a. Note: For shorter heights, the holes of the larger diameter tube will be at the bottom (i.e. near the footer).
3. Lift the smaller diameter post to provide the tallest assembly height achievable for the given conditions. With the holes aligned between the outside and inside tube, install two carriage bolts through the aligned holes and install the acorn nuts onto the threaded portion of the carriage bolts (Figure 3).
 - a. Note: It is imperative that both carriage bolts are installed through the holes of the inside and outside tubing.
4. With the adjusting screw and nut, turn the round nut to the top of the threads of the adjusting screw. Place the adjustment screw on top of the smaller diameter post. The tapered side of the nut will fit into the smaller diameter post with the shoulder of the nut resting on top of the post (Figure 4).
 - a. Note: If the assembly was installed too high, it may prevent the installation of the adjusting nut and screw. If this is the case, go back to step 3 and readjust the assembly.
5. Place the other plate on top of the adjusting screw with the flat side of the plate facing up and use an adjustable wrench to complete the fine adjustment (Figure 5).


Note:

- For best support under wooden structures place the larger diameter tube and plate up against the wooden support (Figure 6)
- Make sure post is centered under beam and is vertically plumb (straight)
- Secure plates with proper nails, screws or bolts.
- To correct sagging floors, place beam under joists and hold in place with two Telescoping posts. Adjust the post one-half turn each week over several weeks.
- Telescoping posts should be used as additional support, not the primary means of support.
- When used in a lifting application consult a licensed engineer to determine safe allowable load.



POTEAU DE SOUTIEN TÉLESCOPIQUE

INSTRUCTIONS D'INSTALLATION DE L'ÉTAI

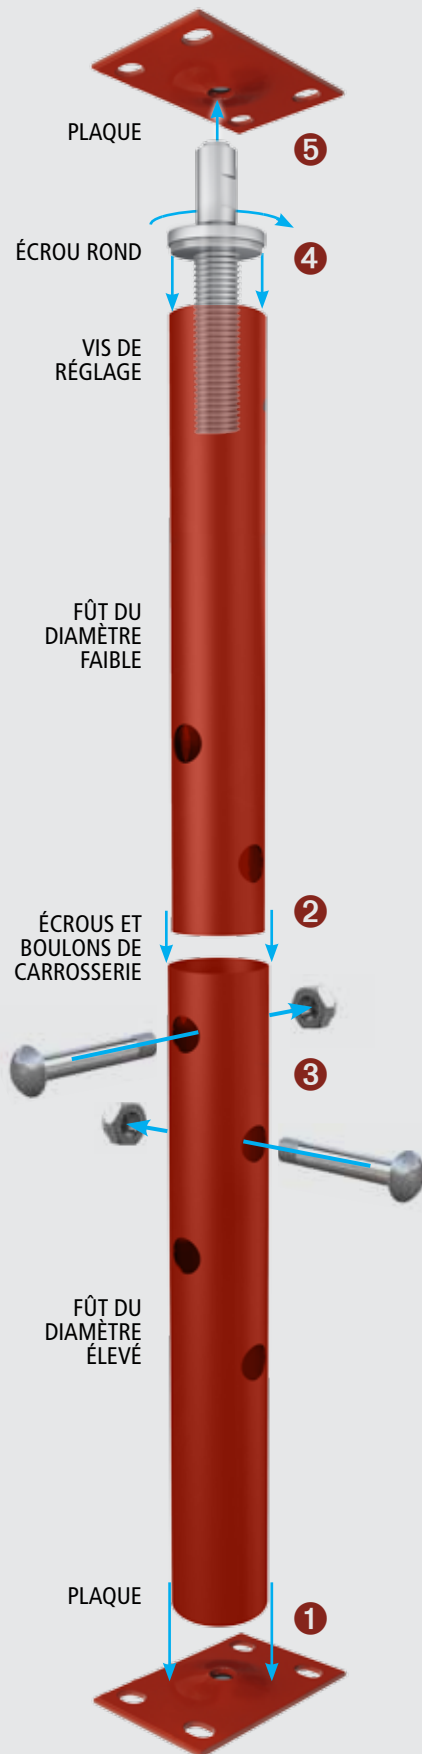

1. Placez le côté plat d'une des plaques sur le sol. Placez le fût du diamètre le plus élevé sur la plaque avec les trous orientés vers le haut (**Figure 1**). Inversez pour les applications plus courtes. Pour les étais de 30 à 38 cm (12 à 15 po) passez les étapes 2 et 3.
2. Insérez le fût du diamètre le plus faible dans le fût du diamètre le plus élevé. Le trou d'extrémité du tube du diamètre le plus faible doit être inséré dans le tube de diamètre extérieur (**Figure 2**).
 - a. Remarque : pour les plus petites hauteurs, les trous du tube du diamètre le plus élevé seront en bas (près de la base).
3. Soulevez le fût du diamètre le plus faible pour obtenir la hauteur la plus grande pouvant être obtenue pour les conditions données. Alignez les trous des tubes extérieur et intérieur. Insérez deux boulons de carrosserie dans l'alignement des trous et placez les écrous borgnes sur la portion fileté des boulons (**Figure 3**).
 - a. Remarque : il est impératif d'insérer les deux boulons de carrosserie dans les trous des tubes intérieur et extérieur.
4. À l'aide de la vis et de l'écrou de réglage, faites tourner l'écrou rond vers le haut du filetage de la vis de réglage. Placez la vis de réglage en haut du fût du diamètre le plus petit. La partie conique de l'écrou s'insère dans le fût du diamètre le plus petit, l'épaulement de l'écrou reposant sur le haut du fût (**Figure 4**).
 - a. Remarque : une installation trop élevée de l'ensemble peut empêcher l'installation de la vis et de l'écrou de réglage. Dans ce cas, revenez à l'étape 3 et réajustez l'ensemble.
5. Placez l'autre plaque au-dessus de la vis de réglage, le côté plat de la plaque vers le haut, et utilisez une clé à molette pour affiner le réglage (**Figure 5**).

Remarque :

- Pour un meilleur soutien sous les structures en bois, placez le tube du plus grand diamètre et la plaque contre le support en bois (**Figure 6**)
- Veillez à ce que le fût soit centré sous la poutre et vertical (droit)
- Sécurisez les plaques de manière appropriée avec des clous, des vis ou des chevilles.
- Pour corriger des planchers affaiblis, placez une poutre sous les solives et maintenez l'ensemble en place avec deux étais télescopiques. Ajustez les étais d'un demi-tour chaque semaine pendant plusieurs semaines.
- Les étais télescopiques ne doivent servir que pour un soutien supplémentaire, en aucun cas pour le soutien principal.
- Pour une utilisation dans une application de soulèvement, consultez un ingénieur qualifié pour déterminer la charge maximale autorisée.



TEMPORARY SHORE JACK

TEMPORARY SHORING SUPPORT



The Shore Jack™ offers a convenient and durable way to make structural repairs and functions as temporary support for various construction and remodeling projects.

- Transforms a nominal 4 x 4 lumber into a versatile adjustable post
- Recommended as a temporary or non-primary support.
- Load capacity dependent on a 4 x 4 used up to 24,700 lbs.
- Consult with your wood supplier for allowable load
- 4" height adjustment creates an adjustable post

USE FOR:


- Construction projects
- Repairs or installations
- Renovations
- Sagging floors
- Crawl spaces

Use a
4" x 4"
wood post
and cut
to desired
length.

TEMPORARY SHORE JACK

MODEL#	ADJUSTMENT RANGE	UPC
S301944PC	4"	8904750013018

Fits a 4"x 4" timber post (3.75"x 3.75" ID), height fully retracted: 14 5/16", 4" screw adjustment fully extended equals overall height at 18 5/16"

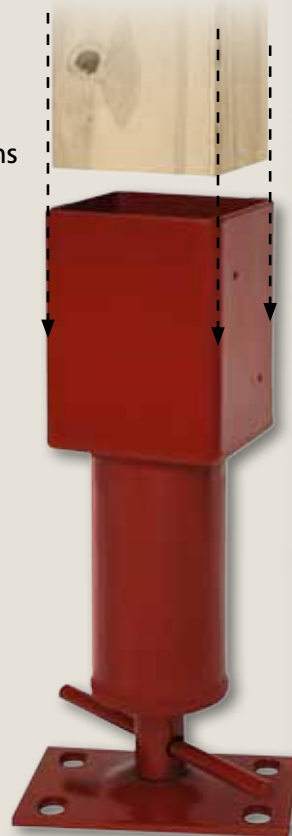

The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

CRIC D'ÉTAYAGE TEMPORAIRE SHORE JACK

SOUTIEN D'ÉTAYAGE TEMPORAIRE




Le Shore Jack^{MC} offre une façon pratique et durable d'effectuer des réparations structurales et peut servir de soutien temporaire pour toute une gamme de projets de construction et de rénovation.

- Transforme une pièce de bois de 10 cm x 10 cm (4 po x 4 po) en un poteau ajustable polyvalent
- Recommandé pour un soutien temporaire ou secondaire
- Capacité de charge en fonction de la pièce de 10 cm x 10 cm (4 po x 4 po) utilisée pouvant aller jusqu'à 11 204 kg (24 700 lb).
- Consultez votre fournisseur de bois pour la charge permise
- Permet de créer un poteau ajustable en hauteur de 10 cm (4 po)

À UTILISER POUR :

- Projets de construction
- Réparations ou installations
- Rénovations
- Planchers qui s'affaissent
- Vides sanitaires

Utilisez un poteau en bois de 10 cm x 10 cm (4 po x 4 po) et coupez-le à la longueur désirée.

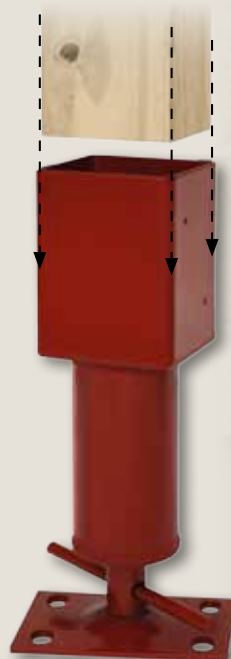

TEMPORAIRE SHORE JACK

NO DE MODÈLE	PLAGE D'AJUSTEMENT	UPC
S301944PC	4"	8904750013018

Conçu pour accueillir une pièce de bois de 10 cm x 10 cm (4 po x 4 po) (D.I. de 9,5 cm x 9,5 cm [3,75 po x 3,75 po]), hauteur sans ajustement : 36,4 cm (14 5/16 po), avec la vis d'ajustement de 10 cm (4 po) complètement déployée, équivaut à une hauteur totale de 46,5 cm (18 5/16 po)



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

MOBILE HOME JACKS

MOBILE HOME AND RV STABILIZATION.

MOBILE HOME JACKS

11 GA.	ADJUSTMENT RANGE	UPC	ALLOWABLE LOAD	WEIGHT	UNIT CUBE
J Mobile	1' - 1' 4" / 12"-16"	7-16733-90001-1	24,700	9 lbs.	0.5

Available in both Standard Series and H Plates

State-of-the-art multi-purpose jacks:

- Perfect for stabilizing RV and other trailers when parked
- Easy to store, easy to install, easy to adjust from 12" to 16"



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

© Akron Products Company 2014

CRICS POUR MAISONS MOBILES

STABILISATION DES MAISONS MOBILES
ET DES VÉHICULES RÉCRÉATIFS.

MOBILE HOME JACKS

11 GA.	PLAGE D'AJUSTEMENT	UPC	CHARGE PERMISE	POIDS	UNITÉ CUBIQUE
J Mobile	1' - 1' 4" / 12"-16"	7-16733-90001-1	24,700	9 lbs.	0.5

Offerts en série standard et avec plaques en H

Cric multifonction de pointe :

- Idéal pour stabiliser des véhicules récréatifs et autres remorques lorsqu'ils sont garés
- Facile à entreposer, facile à installer et facile à ajuster entre 30,5 cm et 40,6 cm (12 po et 16 po)



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca


MONO POSTS

ULTIMATE STRENGTH, ULTIMATE EFFICIENCY
FOR PERMANENT NEW HOME CONSTRUCTION
AND REMODELING SUPPORT.




- Adjustable Mono Posts can be installed in fifteen minutes by a single worker
- Set MONO-POST perpendicular between footer and beam with adjustment screw on footer; adjust screw until post is firmly in position

- Additional adjustments may be made during construction to maintain level floor
- Tamper proof adjustment... **poured concrete floor locks MONO-POST adjustment permanently** when correctly installed
- 11 gauge MONO-POSTS available in 3", 3 1/2", 4" OD, and 3 1/2" OD Schedule 40
- Corrosion resistant powder coating that exceeds ASTM-B117-85
- Lengths available in 3" increments up to 12 feet
- Fully assembled, self-contained, no loose parts
- Refer to current ICC-ES report for load values



STANDARD END PLATE

USED WITH WOOD BEAMS
4" x 6" x .250" thick



"H" PLATE

USED WITH STEEL BEAMS
4" x 6" x .250" thick



SWIVEL END PLATE

4" x 6" x .250" thick

SCREW: 1 1/4" O.D., 7 Pitch
"V" thread with 4" adjustment

NUT: 3" O.D. tapped for 1 1/4"
7 pitch thread

CCMC Evaluation
Listing 13250-L,
Conforms to
CAN/CGSB-7.2-94




POTEAUX MONOTUBULAIRES

**ROBUSTESSE INCOMPARABLE ET EFFICACITÉ
INCOMPARABLE POUR LE SOUTIEN DES
NOUVELLES CONSTRUCTIONS OU LES
RÉNOVATIONS.**




- Poteaux monotubulaires ajustables qui peuvent être installés en quinze minutes par un seul travailleur
- Possibilité de placer un poteau monotubulaire en perpendiculaire entre le pied et la poutre avec la vis d'ajustement sur le pied; il suffit d'ajuster la vis pour fixer le poteau en place
- Des ajustements supplémentaires peuvent être effectués au cours de la construction pour maintenir le plancher droit
- Ajustement sécurisé... un plancher en béton coulé verrouille de façon permanente l'ajustement d'un POTEAU MONOTUBULAIRE lorsqu'il est installé correctement
- Poteaux monotubulaires de calibre 11 offerts en D.E. de 7,6 cm, 8,9 cm et 10 cm (3 po, 3 ½ po, 4 po) et DE schéma 40 de 8,9 cm (3 ½ po)
- Revêtement en poudre résistant à la corrosion qui excède la norme ASTM-B117-85
- Longueurs offertes par paliers de 7,6 cm (3 po) jusqu'à un maximum de 3,7 m (12 pi)
- Assemblage complet, autonome, aucune pièce détachée
- Veuillez consulter le rapport actuel ICC-ES pour les charges



PLAQUE D'EXTRÉMITÉ STANDARD

UTILISÉE POUR LES POUTRES DE BOIS
10,8 cm x 19,1 cm x 0,64 cm d'épaisseur
(4 po x 7 po x 0,250 po)



PLAQUE EN H

UTILISÉE POUR LES POUTRES D'ACIER
10,8 cm x 18,4 cm x 0,64 cm d'épaisseur
(4 po x 7 po x 0,250 po)



PLAQUE D'EXTRÉMITÉ ROTATIVE


10 cm x 15,2 cm x 0,64 cm d'épaisseur
(4 po x 6 po x 0,250 po)

VIS : DE de 3,2 cm (1¼ po), filet à 7 pas en « V » avec ajustement de 10 cm (4 po)
ÉCROU : DE de 7,6 cm (3 po) ajusté pour filet à 7 pas de 3,2 cm (1¼ po)

**Fiche d'évaluation
CCMC 13250-L,
conforme à la norme
CAN/CGSB-7.2-94**



MONO POSTS

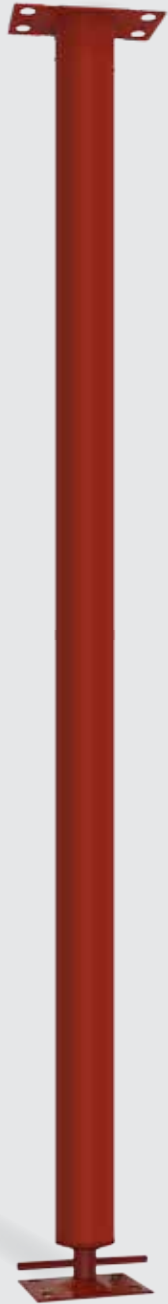

3" O.D., 11 GAUGE STEEL TUBING

MODEL#	ADJUSTMENT RANGE		UPC	ALLOWABLE LOAD	WEIGHT
CA-200	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31256-2	8,742 lbs. (38.9 kN)	30 lbs.
CA-201	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31264-7	8,742 lbs. (38.9 kN)	31 lbs.
CA-202	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31265-4	8,742 lbs. (38.9 kN)	32 lbs.
CA-203	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31253-1	8,742 lbs. (38.9 kN)	33 lbs.
CA-204	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31254-8	8,742 lbs. (38.9 kN)	34 lbs.
CA-205	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31255-5	8,742 lbs. (38.9 kN)	35 lbs.
CA-206	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31249-4	8,742 lbs. (38.9 kN)	36 lbs.
CA-207	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31257-9	8,742 lbs. (38.9 kN)	37 lbs.
CA-208	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31258-6	8,742 lbs. (38.9 kN)	37 lbs.
CA-209	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31259-3	8,742 lbs. (38.9 kN)	38 lbs.
CA-210	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31250-0	8,742 lbs. (38.9 kN)	39 lbs.
CA-211	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31251-7	8,742 lbs. (38.9 kN)	40 lbs.
CA-212	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31252-4	8,742 lbs. (38.9 kN)	41 lbs.
CA-213	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31260-9	8,742 lbs. (38.9 kN)	42 lbs.
CA-214	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31261-6	8,742 lbs. (38.9 kN)	43 lbs.
CA-215	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31262-3	8,742 lbs. (38.9 kN)	44 lbs.

3½" O.D., 11 GAUGE STEEL TUBING

MODEL#	ADJUSTMENT RANGE		UPC	ALLOWABLE LOAD	WEIGHT
CA-300	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31289-0	15,717 lbs. (69.9 kN)	34 lbs.
CA-301	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31290-6	15,717 lbs. (69.9 kN)	35 lbs.
CA-302	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31291-3	15,717 lbs. (69.9 kN)	36 lbs.
CA-303	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31292-0	15,717 lbs. (69.9 kN)	38 lbs.
CA-304	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31263-0	15,717 lbs. (69.9 kN)	62 lbs.
CA-305	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31293-7	15,717 lbs. (69.9 kN)	39 lbs.
CA-306	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31266-1	15,717 lbs. (69.9 kN)	40 lbs.
CA-307	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31267-8	15,717 lbs. (69.9 kN)	41 lbs.
CA-308	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31268-5	15,717 lbs. (69.9 kN)	42 lbs.
CA-309	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31294-4	15,717 lbs. (69.9 kN)	43 lbs.
CA-310	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31295-1	15,717 lbs. (69.9 kN)	45 lbs.
CA-311	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31269-2	15,717 lbs. (69.9 kN)	46 lbs.
CA-312	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31296-8	15,717 lbs. (69.9 kN)	47 lbs.
CA-313	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31297-5	15,717 lbs. (69.9 kN)	48 lbs.
CA-314	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31298-2	15,717 lbs. (69.9 kN)	49 lbs.
CA-315	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31270-8	15,717 lbs. (69.9 kN)	50 lbs.
CA-316	10' - 10' 4"	3048 mm - 3149.6 mm	7-16733-31271-5	15,717 lbs. (69.9 kN)	51 lbs.

3½" O.D., SCHEDULE 40 SERIES

MODEL#	ADJUSTMENT RANGE		UPC	ALLOWABLE LOAD	WEIGHT
CA-300-40	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31272-2	18,507 lbs. / 82.3 kN	54 lbs.
CA-301-40	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31273-9	18,507 lbs. / 82.3 kN	56 lbs.
CA-302-40	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31274-6	18,507 lbs. / 82.3 kN	58 lbs.
CA-303-40	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31275-3	18,507 lbs. / 82.3 kN	60 lbs.
CA-304-40	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31276-0	18,507 lbs. / 82.3 kN	62 lbs.
CA-305-40	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31277-7	18,507 lbs. / 82.3 kN	64 lbs.
CA-306-40	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31278-4	18,507 lbs. / 82.3 kN	66 lbs.
CA-307-40	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31279-1	18,507 lbs. / 82.3 kN	67 lbs.
CA-308-40	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31280-7	18,507 lbs. / 82.3 kN	69 lbs.
CA-309-40	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31281-4	18,507 lbs. / 82.3 kN	71 lbs.
CA-310-40	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31282-1	18,507 lbs. / 82.3 kN	73 lbs.
CA-311-40	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31283-8	18,507 lbs. / 82.3 kN	75 lbs.
CA-312-40	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31284-5	18,507 lbs. / 82.3 kN	77 lbs.
CA-313-40	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31285-2	18,507 lbs. / 82.3 kN	79 lbs.
CA-314-40	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31286-9	18,507 lbs. / 82.3 kN	81 lbs.
CA-315-40	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31287-6	18,507 lbs. / 82.3 kN	83 lbs.
CA-316-40	10' - 10' 4"	3048.0mm - 3149.6mm	7-16733-31288-3	18,507 lbs. / 82.3 kN	85 lbs.

**CCMC Evaluation
Listing 13250-L,
Conforms to
CAN/CGSB-7.2-94**

- Minimum yield strength of 42,000 psi. complies with ASTM A500.
- Finished with corrosion resistant coating that exceeds ASTM-B117-85. One year limited warranty.

STANDARD END PLATE: 4¼" x 7½" x .250"

"H" PLATE: 4¼" X 7¼" x .250"

SWIVEL END PLATE: 4" x 6" x .250"

(Please specify either Standard or H Series Plate when ordering)



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

POTEAUX MONOTUBULAIRES



- Limite d'élasticité minimale de 42 000 psi. est conforme à la norme ASTM A500.
- Fini avec revêtement résistant à la corrosion supérieure ASTM-B117-85. Garantie limitée d'un an.

TUBE EN ACIER DE CALIBRE 11 DE DE DE 7,6 CM (3 PO)

NO DE MODÈLE	PLAGE D'AJUSTEMENT		UPC	CHARGE PERMISE	POIDS
CA-200	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31256-2	8,742 lbs. (38.9 kN)	30 lbs.
CA-201	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31264-7	8,742 lbs. (38.9 kN)	31 lbs.
CA-202	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31265-4	8,742 lbs. (38.9 kN)	32 lbs.
CA-203	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31253-1	8,742 lbs. (38.9 kN)	33 lbs.
CA-204	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31254-8	8,742 lbs. (38.9 kN)	34 lbs.
CA-205	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31255-5	8,742 lbs. (38.9 kN)	35 lbs.
CA-206	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31249-4	8,742 lbs. (38.9 kN)	36 lbs.
CA-207	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31257-9	8,742 lbs. (38.9 kN)	37 lbs.
CA-208	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31258-6	8,742 lbs. (38.9 kN)	37 lbs.
CA-209	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31259-3	8,742 lbs. (38.9 kN)	38 lbs.
CA-210	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31250-0	8,742 lbs. (38.9 kN)	39 lbs.
CA-211	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31251-7	8,742 lbs. (38.9 kN)	40 lbs.
CA-212	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31252-4	8,742 lbs. (38.9 kN)	41 lbs.
CA-213	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31260-9	8,742 lbs. (38.9 kN)	42 lbs.
CA-214	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31261-6	8,742 lbs. (38.9 kN)	43 lbs.
CA-215	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31262-3	8,742 lbs. (38.9 kN)	44 lbs.

TUBE EN ACIER DE CALIBRE 11 DE DE DE 7,6 CM (3 ½ PO)

NO DE MODÈLE	PLAGE D'AJUSTEMENT		UPC	CHARGE PERMISE	POIDS
CA-300	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31289-0	15,717 lbs. (69.9 kN)	34 lbs.
CA-301	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31290-6	15,717 lbs. (69.9 kN)	35 lbs.
CA-302	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31291-3	15,717 lbs. (69.9 kN)	36 lbs.
CA-303	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31292-0	15,717 lbs. (69.9 kN)	38 lbs.
CA-304	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31263-0	15,717 lbs. (69.9 kN)	62 lbs.
CA-305	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31293-7	15,717 lbs. (69.9 kN)	39 lbs.
CA-306	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31266-1	15,717 lbs. (69.9 kN)	40 lbs.
CA-307	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31267-8	15,717 lbs. (69.9 kN)	41 lbs.
CA-308	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31268-5	15,717 lbs. (69.9 kN)	42 lbs.
CA-309	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31294-4	15,717 lbs. (69.9 kN)	43 lbs.
CA-310	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31295-1	15,717 lbs. (69.9 kN)	45 lbs.
CA-311	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31269-2	15,717 lbs. (69.9 kN)	46 lbs.
CA-312	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31296-8	15,717 lbs. (69.9 kN)	47 lbs.
CA-313	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31297-5	15,717 lbs. (69.9 kN)	48 lbs.
CA-314	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31298-2	15,717 lbs. (69.9 kN)	49 lbs.
CA-315	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31270-8	15,717 lbs. (69.9 kN)	50 lbs.
CA-316	10' - 10' 4"	3048 mm - 3149.6 mm	7-16733-31271-5	15,717 lbs. (69.9 kN)	51 lbs.

SÉRIE SCHÉMA 40 AVEC DE DE DE 8,9 CM (3 ½ PO)

NO DE MODÈLE	PLAGE D'AJUSTEMENT		UPC	CHARGE PERMISE	POIDS
CA-300-40	6' - 6' 4"	1828.8 mm - 1930.4 mm	7-16733-31272-2	18,507 lbs. / 82.3 kN	54 lbs.
CA-301-40	6' 3" - 6' 7"	1905 mm - 2006.6 mm	7-16733-31273-9	18,507 lbs. / 82.3 kN	56 lbs.
CA-302-40	6' 6" - 6' 10"	1981.2 mm - 2082.8 mm	7-16733-31274-6	18,507 lbs. / 82.3 kN	58 lbs.
CA-303-40	6' 9" - 7' 1"	2057.4 mm - 2159 mm	7-16733-31275-3	18,507 lbs. / 82.3 kN	60 lbs.
CA-304-40	7' - 7' 4"	2133.6 mm - 2235.2 mm	7-16733-31276-0	18,507 lbs. / 82.3 kN	62 lbs.
CA-305-40	7' 3" - 7' 7"	2209.8 mm - 2311.4 mm	7-16733-31277-7	18,507 lbs. / 82.3 kN	64 lbs.
CA-306-40	7' 6" - 7' 10"	2286 mm - 2387.6 mm	7-16733-31278-4	18,507 lbs. / 82.3 kN	66 lbs.
CA-307-40	7' 9" - 8' 1"	2362.2 mm - 2463.8 mm	7-16733-31279-1	18,507 lbs. / 82.3 kN	67 lbs.
CA-308-40	8' - 8' 4"	2438.4 mm - 2540 mm	7-16733-31280-7	18,507 lbs. / 82.3 kN	69 lbs.
CA-309-40	8' 3" - 8' 7"	2514.6 mm - 2616.2 mm	7-16733-31281-4	18,507 lbs. / 82.3 kN	71 lbs.
CA-310-40	8' 6" - 8' 10"	2590.8 mm - 2692.4 mm	7-16733-31282-1	18,507 lbs. / 82.3 kN	73 lbs.
CA-311-40	8' 9" - 9' 1"	2667 mm - 2768.6 mm	7-16733-31283-8	18,507 lbs. / 82.3 kN	75 lbs.
CA-312-40	9' - 9' 4"	2743.2 mm - 2844.8 mm	7-16733-31284-5	18,507 lbs. / 82.3 kN	77 lbs.
CA-313-40	9' 3" - 9' 7"	2819.4 mm - 2921 mm	7-16733-31285-2	18,507 lbs. / 82.3 kN	79 lbs.
CA-314-40	9' 6" - 9' 10"	2895.6 mm - 2997.2 mm	7-16733-31286-9	18,507 lbs. / 82.3 kN	81 lbs.
CA-315-40	9' 9" - 10' 1"	2971.8 mm - 3073.4 mm	7-16733-31287-6	18,507 lbs. / 82.3 kN	83 lbs.
CA-316-40	10' - 10' 4"	3048.0mm - 3149.6mm	7-16733-31288-3	18,507 lbs. / 82.3 kN	85 lbs.

Fiche d'évaluation
CCMC 13250-L,
conforme à la norme
CAN/CGSB-7.2-94

PLAQUE D'EXTRÉMITÉ STANDARD

UTILISÉE POUR LES POUTRES DE BOIS
10,8 cm x 19,1 cm x 0,64 cm d'épaisseur
(4 ¼ po x 7 ½ po x 0,250 po)

PLAQUE EN H

UTILISÉE POUR LES POUTRES
D'ACIER 10,8 cm x 18,4 cm x 0,64
cm d'épaisseur (4 ¼ po x 7 ¼ po x
0,250 po)

PLAQUE D'EXTRÉMITÉ ROTATIVE

10 cm x 15,2 cm x 0,64 cm d'épaisseur
(4 po x 6 po x 0,250 po)
VIS : DE 3,2 cm (1 ¼ po), filet à 7 pas
en « V » avec ajustement de 10 cm (4 po)
ÉCROU : DE 7,6 cm (3 po) ajusté pour
filet à 7 pas de 3,2 cm (1 ¼ po)



LOAD
CARRYING
BEAM

MONO POSTS

INSTALLATION INSTRUCTIONS

Installation Time: Approximately 15 Minutes

Tools Required: None

1. Choose the correct size and strength Mono-Post for the project based on construction document.
2. Adjust screw to slightly short of the length needed between footer and load carrying beam at installation location (**Figure 1**).
3. Place Mono-Post vertically between footer and beam with the adjustment nut and screw on the footer (adjustable end down) (**Figure 2**).
4. Adjust screw to wedge the Mono-Post between footer and beam, tighten until Mono-Post is firmly centered directly under the load carrying beam and the footer below (**Figure 3**).
5. Additional screw adjustments may be made during construction to keep floor level
6. Poured concrete basement floor permanently locks Mono-Post adjustment (**Figure 4**).

TAMPER PROOF ADJUSTMENT: MONO-POST SHOULD BE POSITIONED WITH ADJUSTMENT NUT AND SCREW AT THE FOOTER.



ADJUSTMENT NUT
AND SCREW



Note: Always consult Local Building Codes for specific installation requirements in your area.



DE CHARGE
FAISCEAU

POTEAUX MONOTUBULAIRES

INSTRUCTIONS D'INSTALLATION

Temps d'installation : environ 15 minutes

Outils requis : aucun

1. Choisissez le poteau simple de la longueur et de la force adaptées au projet en fonction des documents de construction
2. Sur le site de l'installation, ajustez la vis pour obtenir une longueur légèrement inférieure à la longueur requise entre la base et la poutre porteuse (**Figure 1**).
3. Placez le poteau simple verticalement entre la base et la poutre, l'écrou et la vis de réglage sur la base (extrémité réglable vers le bas) (**Figure 2**).
4. Réglez la vis pour caler le poteau simple entre la base et la poutre, et resserrez jusqu'à ce que le poteau simple soit fermement centré directement sous la poutre porteuse et avec la base (**Figure 3**).
5. Il est possible d'effectuer des réglages supplémentaires de la vis pendant la construction afin de maintenir le niveau du plancher
6. Le cimentage du sol fixe de manière permanente le réglage du poteau simple (**Figure 4**).

POUR UN RÉGLAGE PROTÉGÉ CONTRE LES MANIPULATIONS : LE POTEAU SIMPLE DOIT ÊTRE POSITIONNÉ AVEC L'ÉCROU ET LA VIS DE RÉGLAGE SUR LA BASE.



ÉCROU DE RÉGLAGE
ET LA VIS



FOOTER

Remarque : consultez toujours le code du bâtiment local pour connaître les exigences d'installation spécifiques dans votre région.



MINI COLUMNS

COMPACT PERMANENT SUPPORT FOR RENOVATIONS AND CONSTRUCTION PROJECTS.

State-of-the-art multi-purpose mini columns:

- Ideal permanent support for crawl spaces, under windows and tight confines
- Easy to store, easy to install, easy to adjust

MINI COLUMNS

NO.	UPC	NO.	UPC	DESCRIPTION	ALLOWABLE LOAD
P M110	716733990012	P H110	716733990166	1'0" - 1'4" 3"	24,700
P M114	716733990029	P H114	716733990173	1'4" - 1'8" 3"	24,700
P M118	716733990036	P H118	716733990180	1'8" - 2'0" 3"	24,700
P M120	716733990043	P H120	716733990197	2'0" - 2'4" 3"	23,700
P M124	716733990050	P H124	716733990203	2'4" - 2'8" 3"	23,700
P M128	716733990067	P H128	716733990210	2'8" - 3'0" 3"	23,700
P M130	716733990074	P H130	716733990227	3'0" - 3'4" 3"	22,300
P M134	716733990081	P H134	716733990234	3'4" - 3'8" 3"	22,300
P M138	716733990098	P H138	716733990241	3'8" - 4'0" 3"	22,300
P M140	716733990104	P H140	716733990258	4'0" - 4'4" 3"	20,700
P M144	716733990111	P H144	716733990265	4'4" - 4'8" 3"	20,700
P M148	716733990128	P H148	716733990272	4'8" - 5'0" 3"	20,700
P M150	716733990135	P H150	716733990272	5'0" - 5'4" 3"	18,800
P M154	716733990142	P H154	716733990289	5'4" - 5'8" 3"	18,800
P M158	716733990159	P H158	716733990296	5'8" - 6'0" 3"	18,800

Available in both Standard Series and H Plates



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

MINICOLONNES

**SOUTIEN COMPACT PERMANENT
POUR LES RÉNOVATIONS ET LES
PROJETS DE CONSTRUCTION.**

Minicolonne multifonction de pointe :

- Idéale pour le soutien des vides sanitaires, sous les fenêtres et dans les endroits restreints
- Facile à entreposer, facile à installer et facile à ajuster

MINICOLONNES

NO.	UPC	NO.	UPC	DESCRIPTION	CHARGE PERMISE
P M110	716733990012	P H110	716733990166	1'0" - 1'4" 3"	24,700
P M114	716733990029	P H114	716733990173	1'4" - 1'8" 3"	24,700
P M118	716733990036	P H118	716733990180	1'8" - 2'0" 3"	24,700
P M120	716733990043	P H120	716733990197	2'0" - 2'4" 3"	23,700
P M124	716733990050	P H124	716733990203	2'4" - 2'8" 3"	23,700
P M128	716733990067	P H128	716733990210	2'8" - 3'0" 3"	23,700
P M130	716733990074	P H130	716733990227	3'0" - 3'4" 3"	22,300
P M134	716733990081	P H134	716733990234	3'4" - 3'8" 3"	22,300
P M138	716733990098	P H138	716733990241	3'8" - 4'0" 3"	22,300
P M140	716733990104	P H140	716733990258	4'0" - 4'4" 3"	20,700
P M144	716733990111	P H144	716733990265	4'4" - 4'8" 3"	20,700
P M148	716733990128	P H148	716733990272	4'8" - 5'0" 3"	20,700
P M150	716733990135	P H150	716733990272	5'0" - 5'4" 3"	18,800
P M154	716733990142	P H154	716733990289	5'4" - 5'8" 3"	18,800
P M158	716733990159	P H158	716733990296	5'8" - 6'0" 3"	18,800

Offerts en série standard et avec plaques en H



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

THE GRABBER SADDLE PLATE


SADDLE PLATE FOR LAMINATED (LVL) OR DIMENSIONAL LUMBER BEAMS.



GRABBER SADDLE PLATE

PART#	DIMENSIONS	UPC	SHELF PACK	WT. PC.
SP5716	5 ³ / ₈ " W x 3 ⁹ / ₁₆ " H x 8" L	8-90475-001716-0	12	3.7 lbs.
SP3916	3 ⁵ / ₈ " W x 3 ⁹ / ₁₆ " H x 8" L	8-90475-001916-4	12	2.4 lbs.

- The Grabber Saddle Plate provides lateral support for dimensional lumber beams and prevents the beam from torquing
- Allows for the through connection of fasteners into the side of the wood beam
- Some municipalities have required the use of a saddle plate for dimensional lumber or LVL beams in conjunction with Adjustable Steel Columns

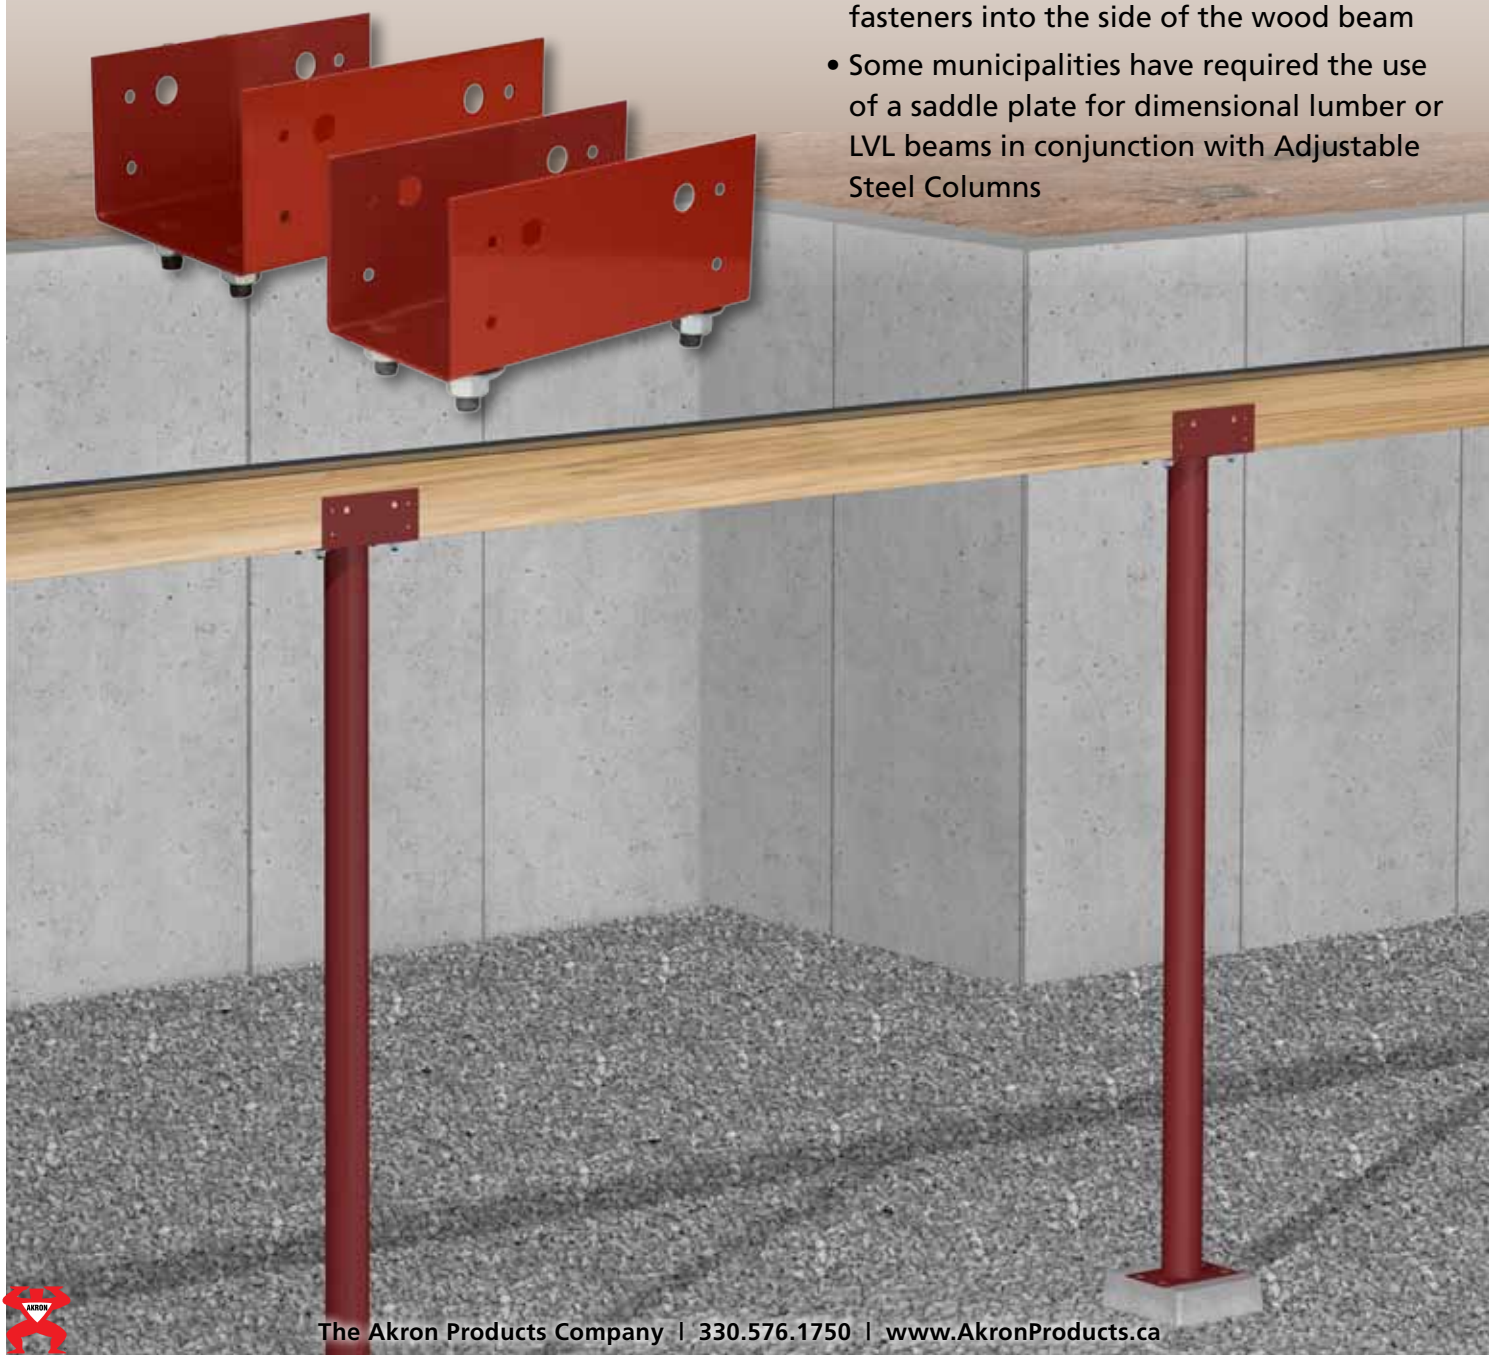

The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

PLAQUE DE SERRAGE AGRIPPANTE

PLAQUE DE SERRAGE POUR LES
POUTRES EN PLACAGE STRATIFIÉ
(LVL) OU LES POUTRES DE BOIS DE
DIMENSION.



PLAQUE DE SERRAGE AGRIPPANTE

PART#	DIMENSIONS	UPC	ENSEMBLE DE MAGASIN	PDS. PC.
SP5716	5 3/8" W x 3 9/16" H x 8" L	8-90475-001716-0	12	3.7 lbs.
SP3916	3 5/8" W x 3 9/16" H x 8" L	8-90475-001916-4	12	2.4 lbs.

- La plaque de serrage agrippante offre un soutien latéral aux poutres de bois de dimension et évite ainsi toute déformation
- Permet d'installer des fixations dans le côté des poutres de bois
- Certaines municipalités nécessitent l'emploi de plaques de serrage avec les poutres en placage stratifié (LVL) ou les poutres de bois de dimension utilisées en conjonction avec des colonnes en acier ajustables



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

AREA WALLS

**ALL-STEEL, SINGLE-PIECE CONSTRUCTION
FOR FAST, EASY INSTALLATION.**

- Area Walls provide more daylight and drainage for at-grade windows
- 22 gauge galvanized steel with deep corrugations for extra strength
- Fully rolled top for rigidity and safety
- Wide, pre-punched flat mounting flanges
- Single-piece construction up to 48" height – no welds


ALL STEEL WINDOW WELLS

Round

MODEL#	HEIGHT/STYLE	UPC	BUNDLE	WEIGHT	UNIT CUBE
AWR12	12" Round	7-16733-90120-9	5	31 lbs.	4.63
AWR15	15" Round	7-16733-90150-6	5	43 lbs.	5.78
AWR18	18" Round	7-16733-90180-3	5	45 lbs.	6.94
AWR24	24" Round	7-16733-90240-4	5	59 lbs.	9.25
AWR30	30" Round	7-16733-90300-5	5	72 lbs.	11.56
AWR36	36" Round	7-16733-90360-9	5	81 lbs.	13.88
AWR48	48" Round	7-16733-90480-4	5	125 lbs.	18.50
12" Vent	12" Round	7-16733-91200-7	10	35 lbs.	2.24

Round

37" wide
16" projection
accommodates
35" to 40" width




Square

MODEL#	HEIGHT/STYLE	UPC	BUNDLE	WEIGHT	UNIT CUBE
AWS12	12" Square	7-16733-90012-7	5	33 lbs.	3.85
AWS15	15" Square	7-16733-90015-8	5	38 lbs.	4.82
AWS18	18" Square	7-16733-90018-9	5	41 lbs.	5.78
AWS24	24" Square	7-16733-90024-0	5	63 lbs.	7.71
AWS30	30" Square	7-16733-90030-1	5	74 lbs.	9.64
AWS36	36" Square	7-16733-90036-3	5	95 lbs.	11.56
AWS48	48" Square	7-16733-90048-6	5	125 lbs.	15.42

Square

37" wide,
13" projection

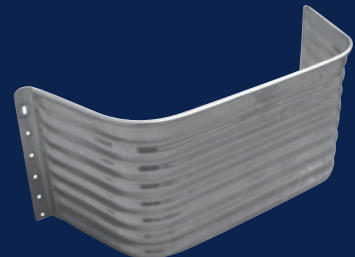

Standard Heights for Both Round & Square (approx.):
12", 15", 18", 24", 30", 36", 48". Standard package: 5 per bundle



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca

PAROIS RIGIDES

**CONSTRUCTION MONOPIÈCE
ENTIÈREMENT EN ACIER POUR UNE
INSTALLATION SIMPLE ET RAPIDE.**


- Parois rigides offrant davantage de soleil et un meilleur drainage pour les fenêtres au niveau du sol
- Acier galvanisé de calibre 22 avec ondulations profondes pour une robustesse accrue
- Rebord entièrement roulé pour davantage de rigidité et de sécurité
- Brides de fixation plates larges et préperçées
- Construction monopiece allant jusqu'à une hauteur de 122 cm (48 po) – sans soudure

PUITS DE FENÊTRE ENTIÈREMENT EN ACIER

Rond						Carré					
MODÈLE #	HAUTEUR/STYLE	UPC	ENSEMBLE	POIDS	UNITÉ CUBIQUE	MODÈLE #	HAUTEUR/STYLE	UPC	ENSEMBLE	POIDS	UNITÉ CUBIQUE
AWR12	12" Round	7-16733-90120-9	5	31 lbs.	4.63	AWS12	12" Square	7-16733-90012-7	5	33 lbs.	3.85
AWR15	15" Round	7-16733-90150-6	5	43 lbs.	5.78	AWS15	15" Square	7-16733-90015-8	5	38 lbs.	4.82
AWR18	18" Round	7-16733-90180-3	5	45 lbs.	6.94	AWS18	18" Square	7-16733-90018-9	5	41 lbs.	5.78
AWR24	24" Round	7-16733-90240-4	5	59 lbs.	9.25	AWS24	24" Square	7-16733-90024-0	5	63 lbs.	7.71
AWR30	30" Round	7-16733-90300-5	5	72 lbs.	11.56	AWS30	30" Square	7-16733-90030-1	5	74 lbs.	9.64
AWR36	36" Round	7-16733-90360-9	5	81 lbs.	13.88	AWS36	36" Square	7-16733-90036-3	5	95 lbs.	11.56
AWR48	48" Round	7-16733-90480-4	5	125 lbs.	18.50	AWS48	48" Square	7-16733-90048-6	5	125 lbs.	15.42
12" Vent	12" Round	7-16733-91200-7	10	35 lbs.	2.24						


Rond

Largeur de 94 cm (37 po)
Projection de 40,6 cm
(16 po)
Convient à une largeur
de 89 cm à 101,6 cm
(35 po à 40 po)



Carré


Largeur de 94 cm
(37 po), projection
de 33 cm (13 po)



Hauteurs standards pour les puits ronds et carrés (approx.) : 30,5 cm, 38,1 cm, 45,7 cm, 61 cm, 76,2 cm, 91,4 cm, 122 cm (12 po, 15 po, 18 po, 24 po, 30 po, 36 po, 48 po). Emballage standard : 5 par paquet



The Akron Products Company | 330.576.1750 | www.AkronProducts.ca



Evaluation Listing CCMC 13250-L

MASTERFORMAT: 05 12 00.02
Issued: 2006-06-30
Re-evaluated: 2012-10-19
Re-evaluation due: 2015-06-30

CA-200, CA-300 and CA-300-40 Series Adjustable Columns

1. Evaluation

These product series conform to CAN/CGSB-7.2-94. The maximum extension for each series is shown in the following table:

Model	Maximum Extension (mm)
CA-200 Series	3073.4
CA-300 Series	3150
CA-300-40 Series	3150

2. Description

The products are Type 2, adjustable, single-tubed steel columns. The main dimensions of each model is outlined in the following table:

Model	Tube	
	Outer Diameter (mm)	Wall Thickness (mm)
CA-200 Series	76	3.0
CA-300 Series	89	3.0
CA-300-40 Series	89	5.5

The top and bottom plates are manufactured in several forms and dimensions meeting the minimum requirements of CAN/CGSB-7.2. See the Preface for details.

3. Standard and Regulatory Information

See the [Preface](#) and the standard for explanation.



Listing Holder: The Akron Products Company
10721 South Water Street
Meadville, PA 16335
U.S.A.
Tel: 330-576-1750
Fax: 330-576-1755
E-mail: info@akronproducts.com
Web: www.akronproducts.ca

Plant(s): Meadville, PA, U.S.A.

This Listing is issued by the Canadian Construction Materials Centre, a program of NRC Construction at the National Research Council of Canada. The Listing must be read in the context of the entire CCMC Registry of Product Evaluations.

Readers must confirm that the Listing is current and has not been withdrawn or superseded by a later issue. Please refer to http://www.nrc-cnrc.gc.ca/eng/solutions/advisory/ccmc_index.html, or contact the Canadian Construction Materials Centre, NRC Construction, National Research Council of Canada, 1200 Montreal Road, Ottawa, Ontario, K1A 0R6. Telephone (613) 993-6189. Fax (613) 952-0268.

NRC has evaluated the material, product, system or service described herein only for those characteristics stated herein. The information and opinions in this Listing are directed to those who have the appropriate degree of experience to use and apply its contents. This Listing is provided without representation, warranty, or guarantee of any kind, expressed, or implied, and the National Research Council of Canada (NRC) provides no endorsement for any evaluated material, product, system or service described herein. NRC accepts no responsibility whatsoever arising in any way from any and all use and reliance on the information contained in this Listing. NRC is not undertaking to render professional or other services on behalf of any person or entity nor to perform any duty owed by any person or entity to another person or entity.





Evaluation Listing CCMC 13269-L

MASTERFORMAT: 05 12 00.02
Issued: 2007-01-08
Re-evaluated: 2010-07-13
Revised: 2011-05-18
Re-evaluation due: 2013-01-08

CA-2, CA-3, CA-84, and CA-108 Adjustable Columns

1. Evaluation

These products conform to CAN/CGSB-7.2-94. The maximum allowable load at the maximum extension is shown in the following table:

Model	Maximum Extension (mm)	Maximum Allowable Load(1)(kN)
CA-2	1 400	57.8
CA-3	910	65.6
CA-84	2 540	36.8
CA-108	2 760	38.5

(1) The maximum allowable load refers to the maximum allowable working load as presented in CAN/CGSB-7.2, Section 5.8.

2. Description

The products are Type 1, telescopic, adjustable, double-tubed steel columns. The main dimensions of each model is outlined in the following table:

Model	Outer Tube		Inner Tube	
	Outer Diameter (mm)	Wall Thickness (mm)	Outer Diameter (mm)	Wall Thickness (mm)
CA-2	71.5	3	63.5	3
CA-3	71.5	3	63.5	3
CA-84	71.5	3	63.5	3
CA-108	71.5	3	63.5	3

The top and bottom plates are manufactured in several forms and dimensions meeting the minimum requirements of CAN/CGSB-7.2. See the Preface for details.

3. Standard and Regulatory Information



Report Holder: The Akron Products Company
10721 South Water Street
Meadville, PA, 16335
U.S.A.
Tel: 330-576-1750
Fax: 330-576-1755
E-mail: info@akronproducts.com
Web: www.akronproducts.ca

Plants: Meadville, PA, U.S.A.

This Report is issued by the Canadian Construction Materials Centre, a program of the Institute for Research in Construction at the National Research Council of Canada. The Report must be read in the context of the entire CCMC Registry of Product Evaluations, including, without limitation, the introduction therein which sets out important information concerning the interpretation and use of CCMC Evaluation Reports.

Readers must confirm that the Report is current and has not been withdrawn or superseded by a later issue. Please refer to <http://www.nrc-cnrc.gc.ca/eng/services/irc/ccmc.html>, or contact the Canadian Construction Materials Centre, Institute for Research in Construction, National Research Council of Canada, 1200 Montreal Road, Ottawa, Ontario, K1A 0R6. Telephone (613) 993-6189. Fax (613) 952-0268.

NRC has evaluated the material, product, system or service described herein only for those characteristics stated herein. The information and opinions in this Report are directed to those who have the appropriate degree of experience to use and apply its contents. This Report is provided without representation, warranty, or guarantee of any kind, expressed, or implied, and the National Research Council of Canada (NRC) provides no endorsement for any evaluated material, product, system or service described herein. NRC accepts no responsibility whatsoever arising in any way from any and all use and reliance on the information contained in this Report. NRC is not undertaking to render professional or other services on behalf of any person or entity nor to perform any duty owed by any person or entity to another person or entity.

